




List 9908

HY-PRO® Shrink Straight Regular Extensions, For Standard Milling/End Mill Chucks

PACKED
1 PIECE

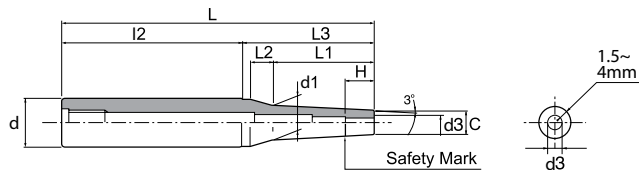

EDP Number	Designation	Body Type	Bore Diameter	Nose Diameter	Shank Length	Neck Length			Neck Diameter	Overall Length	Shank Diameter	Clamping Length	Max Insertion Length
			d3 (Inch)	C (Inch)	L2 (Inch)	L1 (Inch)	L2 (Inch)	L3 (Inch)	d1 (Inch)	L (Inch)	d (Inch)	H (Inch)	H1 (Inch)
9910136	● ST19.05-SLR1/4-110	Regular	0.250	0.490	2.950	0.870	0.374	1.380	0.580	4.330	0.750	0.710	3.660
9910142	● ST19.05-SLR5/16-110	Regular	0.313	0.550	2.950	0.870	0.374	1.380	0.640	4.330	0.750	0.980	3.660
9910147	● ST19.05-SLR3/8-110	Regular	0.375	0.610	2.950	-	-	1.380	-	4.330	0.750	1.180	2.360
9910139	● ST25.4-SLR1/4-8	Regular	0.250	0.490	5.900	1.650	0.510	2.170	1.000	8.000	1.000	0.710	7.360
9910144	● ST25.4-SLR5/16-8	Regular	0.313	0.550	5.900	1.650	0.510	2.170	1.000	8.000	1.000	0.980	7.360
9910149	● ST25.4-SLR3/8-5	Regular	0.375	0.610	3.500	0.870	0.510	1.380	1.000	5.000	1.000	1.180	2.360
9910151	● ST25.4-SLR3/8-7.5	Regular	0.375	0.610	5.300	1.650	0.510	2.170	1.000	7.500	1.000	1.180	2.360
9910156	● ST25.4-SLR1/2-4.5	Regular	0.500	0.810	3.000	0.870	0.510	1.380	1.000	4.500	1.000	1.180	2.360
9910158	● ST25.4-SLR1/2-7	Regular	0.500	0.810	4.700	1.430	0.740	2.170	1.000	7.000	1.000	1.180	2.360

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

The tool should be inserted deeper than the safety mark. Do not exceed the Max Insertion Length.



EDP Number	Designation	Body Type	Bore Diameter	Nose Diameter	Shank Length	Neck Length			Neck Diameter	Overall Length	Shank Diameter	Clamping Length	Max Insertion Length
			d3 (mm)	C (mm)	L2 (mm)	L1 (mm)	L3 (mm)	d1 (mm)	L (mm)	d (mm)	H (mm)	H1 (mm)	
8910401	● ST16-SLRA3-140-M67	Regular	3.0	6.0	60.0	67.0	80.0	13.0	140.0	16.0	9.0	112.0	
8910413	● ST16-SLRA4-140-M60	Regular	4.0	10.0	80.0	60.0	60.0	-	140.0	16.0	12.0	112.0	
8910424	● ST20-SLRB6-120-M42	Regular	6.0	14.0	70.0	42.0	50.0	18.4	120.0	20.0	18.0	92.0	
8910435	● ST20-SLRB8-100-M30	Regular	8.0	18.0	70.0	30.0	30.0	-	100.0	20.0	24.0	72.0	
8910406	● ST25-SLRA3-245-M97	Regular	3.0	6.0	120.0	97.0	125.0	16.2	245.0	25.0	9.0	217.0	
8910415	● ST25-SLRA4-245-M97	Regular	4.0	7.0	120.0	97.0	125.0	17.2	245.0	25.0	12.0	287.0	
8910428	● ST25-SLRB6-240-M42	Regular	6.0	14.0	170.0	42.0	70.0	18.4	240.0	25.0	18.0	212.0	
8910440	● ST25-SLRB8-210-M90	Regular	8.0	18.0	120.0	90.0	90.0	-	210.0	25.0	24.0	182.0	
8910449	● ST25-SLRB10-120-M35	Regular	10.0	22.0	85.0	35.0	35.0	-	120.0	25.0	30.0	60.0	
8910450	● ST25-SLRB10-210-M90	Regular	10.0	22.0	120.0	90.0	90.0	-	210.0	25.0	30.0	60.0	

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

The tool should be inserted deeper than the safety mark. Do not exceed the Max Insertion Length.

