




List 9910

HY-PRO® Shrink Straight Carbide Extensions, For Increased Rigidity and Reach

PACKED
1 PIECE

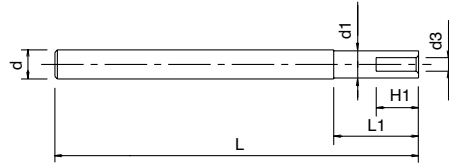

| EDP Number | Designation | Body Type | Bore Diameter | Neck Length | Neck Diameter | Overall Length | Shank Diameter | Max Insertion Length |
|------------|-----------------|-----------|---------------|-------------|---------------|----------------|----------------|----------------------|
| | | | d3 (mm) | L1 (mm) | d1 (mm) | L (mm) | d (mm) | H1 (mm) |
| 8910244 | ● ST10-6-200CS | Regular | 6.0 | 40.0 | 9.9 | 200.0 | 10.0 | 22.0 |
| 8910245 | ● ST12-6-200CS | Regular | 6.0 | 42.0 | 11.9 | 200.0 | 12.0 | 22.0 |
| 8910240 | ● ST16-10-250CS | Regular | 10.0 | 60.0 | 15.9 | 250.0 | 16.0 | 33.0 |
| 8910241 | ● ST20-12-250CS | Regular | 12.0 | 70.0 | 19.9 | 250.0 | 20.0 | 38.0 |


● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

HTE

List 9911

HY-PRO® Shrink Straight Slim Carbide Extensions, For Increased Rigidity and Reach

PACKED
1 PIECE

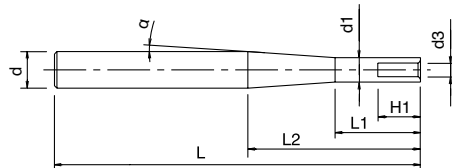

| EDP Number | Designation | Body Type | Bore Diameter | Neck Length | Neck Length | Neck Diameter | Taper Angle | Overall Length | Shank Diameter | Max Insertion Length |
|------------|---------------------|-----------|---------------|-------------|-------------|---------------|-------------|----------------|----------------|----------------------|
| | | | d3 (mm) | L1 (mm) | L2 (mm) | d1 (mm) | α (°) | L (mm) | d (mm) | H1 (mm) |
| 8910246 | ● PC16-6-9.9-250CS | Slim | 6.0 | 40.0 | 124.0 | 9.9 | 2.0 | 250.0 | 16.0 | 22.0 |
| 8910247 | ● PC16-6-11.9-250CS | Slim | 6.0 | 42.0 | 80.0 | 11.9 | 3.0 | 250.0 | 16.0 | 22.0 |
| 8910242 | ● PC20-10-300CS | Slim | 10.0 | 60.0 | 98.0 | 15.9 | 3.0 | 300.0 | 20.0 | 33.0 |
| 8910243 | ● PC25-12-300CS | Slim | 12.0 | 70.0 | 118.0 | 19.9 | 3.0 | 300.0 | 25.0 | 38.0 |

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

HTE

