




## List 2963

EXOCARB® AERO-EDS

SPEED FEED 1454	CARBIDE	DLC	2 FLUTE	25°			SHANK h6	STUB	PACKED 1 PIECE
--------------------	---------	-----	---------	-----	--	--	-------------	------	-------------------

Cutting Diameter Tolerance	
12mm ≤ D ≤ 25mm	+0 / -0.030mm

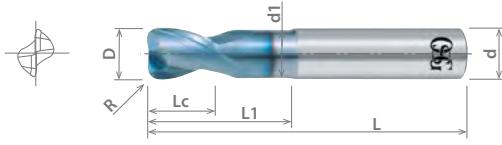

EDP Number		Diameter		Length of Cut		Neck Diameter		Overall Length		Shank Diameter	
		D (mm)	R (mm)	Lc (mm)	L1 (mm)	d1 (mm)	L (mm)	d (mm)			
8528822	●	12.00	1.00	14.00	40.00	11.00	90.00	12.00			
8528823	●	12.00	1.60	14.00	40.00	11.00	90.00	12.00			
8528826	●	12.00	3.00	14.00	40.00	11.00	90.00	12.00			
8528862	●	16.00	1.00	18.00	45.00	14.40	100.00	16.00			
8528863	●	16.00	1.60	18.00	45.00	14.40	100.00	16.00			
8528866	●	16.00	3.00	18.00	45.00	14.40	100.00	16.00			
8528902	●	20.00	1.00	22.00	56.00	18.00	110.00	20.00			
8528903	●	20.00	1.60	22.00	56.00	18.00	110.00	20.00			
8528906	●	20.00	3.00	22.00	56.00	18.00	110.00	20.00			
8528952	●	25.00	1.00	27.00	56.00	23.00	110.00	25.00			
8528953	●	25.00	1.60	27.00	56.00	23.00	110.00	25.00			
8528956	●	25.00	3.00	27.00	56.00	23.00	110.00	25.00			

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium				
Low	Medium	High			6061	7075	Casting		Inconel	6Al4V (30 HRC)						
1010	1035	1065	4140	Die Steel	300	400	17-4 PH	Cast Iron	6061	7075	Casting	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1018	1045		4340													

○ Good ⊙ Best

