




## List 2974

EXOCARB® AERO-O-ETS

<b>SPEED FEED</b> 1377	<b>CARBIDE</b>	<b>DLC</b>		<b>3 FLUTE</b>	<b>30°</b>			<b>SHANK</b> h6	<b>STUB</b>	<b>PACKED</b> 1 PIECE
---------------------------	----------------	------------	--	----------------	------------	--	--	--------------------	-------------	--------------------------

Cutting Diameter Tolerance	
20mm ≤ D ≤ 25mm	+0 / -0.020mm

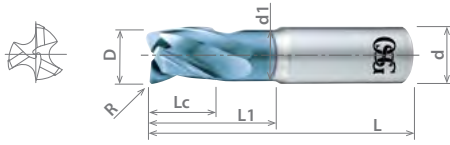

EDP Number	Diameter	Corner Radius	Length of Cut		Neck Length		Overall Length	Shank Diameter
			D (mm)	R (mm)	Lc (mm)	L1 (mm)		
8533300	●	20.00	-	30.00	55.00	18.00	100.00	20.00
8533301	●	20.00	1.00	30.00	55.00	18.00	100.00	20.00
8533302	●	20.00	1.60	30.00	55.00	18.00	100.00	20.00
8533303	●	20.00	3.00	30.00	55.00	18.00	100.00	20.00
8533304	●	20.00	4.00	30.00	55.00	18.00	100.00	20.00
8533305	●	20.00	5.00	30.00	55.00	18.00	100.00	20.00
8533306	●	25.00	-	37.50	55.00	23.00	100.00	25.00
8533307	●	25.00	1.00	37.50	55.00	23.00	100.00	25.00
8533308	●	25.00	1.60	37.50	55.00	23.00	100.00	25.00
8533309	●	25.00	3.00	37.50	55.00	23.00	100.00	25.00
8533310	●	25.00	4.00	37.50	55.00	23.00	100.00	25.00
8533311	●	25.00	5.00	37.50	55.00	23.00	100.00	25.00

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium				
Low	Medium	High			4140 4340	300	400	17-4 PH	6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1010 1018	1035 1045	1065														
									○	○						

○ Good ○ Best

