



## List 4472

EXOCARB® WXS-CRE, High Feed



SPEED FEED  
1444

CARBIDE

WXS

5 FLUTE

28°




SHANK  
h6

STUB

PACKED  
1 PIECE

Cutting Diameter Tolerance	
1/8" ≤ D ≤ 3/16"	+0 / -0.0008"
1/4" ≤ D ≤ 1/2"	+0 / -0.0012"

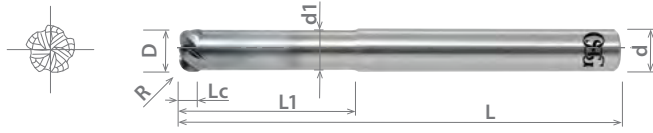

EDP Number	Diameter	Corner Radius	Length of Cut	Neck Length	Neck Diameter	Overall Length	Shank Diameter	
								D (Fractional Size)
447200013	●	1/8	0.031	0.062	0.375	0.113	2.250	0.250
447200113	●	3/16	0.063	0.094	0.562	0.168	2.250	0.250
447200213	●	1/4	0.063	0.098	1.000	0.226	3.000	0.250
447200313	●	5/16	0.094	0.129	1.250	0.280	3.000	0.312
447200413	●	3/8	0.094	0.149	1.500	0.336	4.000	0.375
447200513	●	1/2	0.125	0.200	2.000	0.460	5.000	0.500

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium	Hardened Steel						
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
○	○	○	○	○	○	○		○			○	○	○	○	○	○

○ Good ○ Best

