




## List 52601

OSG PHOENIX® PSE ASF, Screw Fit Head



<b>SPEED FEED</b>	<b>INSERTS</b>	<b>ACCS.</b>	<b>STEEL</b>	<b>PACKED</b>
1529	1213-1215	1216		1 PIECE

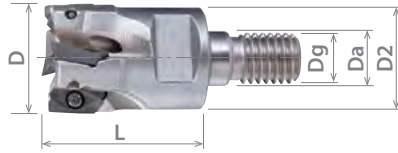

EDP Number	Designation	Diameter	Number of Flutes	Pilot Diameter	Thread Size	Flange Diameter	Overall Length	Spanner Wrench	Applicable Insert
		D (Inch)		Da (Inch)	Dg (mm)	D2 (Inch)	L (Inch)		
52601007	○ PSE07R038ASF6-2	0.375	2	0.256	M6	0.354	1.024	7	ZDKT07
52601008	○ PSE07R050ASF6-3	0.500	3	0.256	M6	0.433	1.024	7	ZDKT07
52601000	● PSE11R063ASF8-2	0.625	2	0.335	M8	0.571	1.063	10	ZD_T11
52601009	○ PSE07R063ASF8-4	0.625	4	0.335	M8	0.571	1.063	10	ZDKT07
52601001	● PSE11R075ASF10-3	0.750	3	0.413	M10	0.709	1.299	14	ZD_T11
52601010	○ PSE07R075ASF10-4	0.750	4	0.413	M10	0.709	1.299	14	ZDKT07
52601004	● PSE15R100ASF12-2	1.000	2	0.492	M12	0.905	1.378	17	ZDKT15
52601002	● PSE11R100ASF12-3	1.000	3	0.492	M12	0.905	1.378	17	ZD_T11
52601011	○ PSE07R100ASF12-5	1.000	5	0.492	M12	0.905	1.378	17	ZDKT07
52601003	● PSE11R125ASF16-3	1.250	3	0.669	M16	1.102	1.575	22	ZD_T11
52601005	● PSE15R125ASF16-3	1.250	3	0.669	M16	1.102	1.575	22	ZDKT15
52601012	○ PSE07R125ASF16-6	1.250	6	0.669	M16	1.102	1.575	22	ZDKT07
52601006	● PSE15R150ASF16-4	1.500	4	0.669	M16	1.102	1.575	22	ZDKT15

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).



ABOUT OSG

DRILLING

THREADING


MILLING

HOLDERS

INDEX

## DESIGNATION EXPLANATION

**PSE 11 R 063 ASF 8-2**



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

