



List 52505 & 78027 - PHOENIX® P5D

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX


Work Material	Tensile Strength - Hardness	Drilling Speed Vc (SFM)	Feed Rate, f (in/rev)								
			Drilling Depth 5D								
			Ø0.472-0.571 (12-14.5mm)	Ø0.591-0.650 (15-16.5mm)	Ø0.669-0.728 (17-18.5mm)	Ø0.748-0.807 (19-20.5mm)	Ø0.827-0.965 (21-24.5mm)	Ø0.984-1.122 (25-28.5mm)	Ø1.142-1.319 (29-33.5mm)	Ø1.339-2.500 (34-63mm)	
P Mild Steels, Carbon Steels (1010, 1018) Carbon Steels, Alloy Steels (1050, 4140) Die Steels (H13, D2)	~180 HB	650 (500 - 800)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.003 (.0015 - .0047)	.003 (.0015 - .0047)	.004 (.002 - .006)	.004 (.002 - .007)	
	~280 HB	500 (330 - 720)	.0024 (.0015 - .0035)	.0024 (.0015 - .0035)	.003 (.0015 - .0047)	.003 (.0015 - .0055)	.0047 (.0015 - .006)	.006 (.0024 - .008)	.007 (.003 - .008)	.007 (.003 - .010)	
	~280 HB	330 (260 - 500)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.004 (.0015 - .0051)	.0047 (.0024 - .006)	.006 (.003 - .007)	.0063 (.003 - .0087)	
M Stainless Steels (304, 420)	~250 HB	430 (260 - 600)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0027 (.0015 - .0035)	.003 (.0015 - .004)	.004 (.0024 - .006)	.0047 (.0024 - .007)	.0047 (.0024 - .008)	
K Cast Iron (No. 35 B) Ductile Cast Iron (60-40-18)	~350 N/mm ²	650 (500 - 920)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.003 (.0015 - .0047)	.003 (.0015 - .0051)	.0047 (.0015 - .006)	.006 (.0024 - .008)	.007 (.003 - .008)	.007 (.003 - .010)	
	~800 N/mm ²	530 (330 - 720)	.0024 (.0015 - .0035)	.0024 (.0015 - .0035)	.003 (.0015 - .0047)	.003 (.0015 - .0047)	.004 (.0015 - .0051)	.0047 (.0024 - .006)	.006 (.003 - .007)	.007 (.003 - .010)	
N Aluminum Alloys (6061, 7075)	~13% Si	650 (330 - 2600)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.0035 (.0015 - .0047)	.004 (.0015 - .006)	.0047 (.0015 - .006)	.006 (.0024 - .010)	.008 (.003 - .012)	.008 (.003 - .012)	
S Heat Resistant Alloys (Inconel 718) Titanium Alloy (Ti-6Al-4V)	-	100 (50 - 160)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0027 (.0024 - .003)	.0027 (.0024 - .003)	.0027 (.0024 - .003)	
	-	200 (100 - 330)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .004)	.004 (.0024 - .006)	.004 (.003 - .006)	.004 (.003 - .006)	
H Pre-hardened Steel (P20, Stavax) Die Cast Steels (A2, 57) Hardened Steels (D2)	40 - 43 Hrc	330 (200 - 400)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.003 (.0015 - .004)	.003 (.0024 - .0047)	.004 (.0024 - .0047)	.004 (.0024 - .0047)	
	43 - 48 Hrc	260 (165 - 330)	.002 (.0015 - .0027)	.002 (.0015 - .0027)	.002 (.0015 - .0027)	.0024 (.0015 - .0027)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.003 (.0015 - .004)	.003 (.0015 - .004)	
	50 - 55 Hrc	200 (130 - 260)	.002 (.0015 - .0027)	.002 (.0015 - .0027)	.002 (.0015 - .0027)	.0024 (.0015 - .0027)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.003 (.0015 - .004)	.003 (.0015 - .004)	





Maximum Offset for Drilling on Lathe

Drill Diameter (Inch)	Maximum Offset (Inch)	Max Diameter (Inch)	Drill Diameter (mm)	Maximum Offset (mm)	Max Diameter (mm)
0.4844	0.0157	0.5158	12.0	0.4	12.8
0.5000	0.0118	0.5236	12.5	0.4	13.3
0.5156	0.0078	0.5312	12.7	0.3	13.3
0.5313	0.0078	0.5469	13.0	0.3	13.6
0.5469	0.0078	0.5625	13.5	0.2	13.9
0.5625	0.0039	0.5703	14.0	0.2	14.4
0.5781	0.0039	0.5859	14.5	0.1	14.7
0.5938	0.0157	0.6252	15.0	0.4	15.8
0.6094	0.0118	0.6330	15.5	0.3	16.1
0.6250	0.0078	0.6406	16.0	0.3	16.6
0.6406	0.0078	0.6562	16.5	0.3	17.1
0.6563	0.0078	0.6719	17.0	0.6	18.2
0.6719	0.0196	0.7111	17.5	0.5	18.5
0.6875	0.0157	0.7189	18.0	0.5	19.0
0.7031	0.0157	0.7345	18.5	0.4	19.3
0.7188	0.0157	0.7502	19.0	0.6	20.2
0.7344	0.0118	0.7580	19.5	0.5	20.5
0.7500	0.0196	0.7892	20.0	0.4	20.8
0.7656	0.0157	0.7970	20.5	0.4	21.3
0.7813	0.0157	0.8127	21.0	0.6	22.2
0.7969	0.0118	0.8205	21.5	0.6	22.7
0.8125	0.0118	0.8361	22.0	0.5	23.0
0.8281	0.0269	0.8819	22.5	0.5	23.5
0.8438	0.0230	0.8898	23.0	0.4	23.8
0.8594	0.0210	0.9014	23.5	0.3	24.1
0.8750	0.0200	0.9150	24.0	0.3	24.6
0.8906	0.0190	0.9286	24.5	0.2	24.9
0.9063	0.0173	0.9409	25.0	0.7	26.4
0.9219	0.0133	0.9485	25.5	0.6	26.7
0.9375	0.0124	0.9623	26.0	0.5	27.0
0.9531	0.0078	0.9687	26.5	0.5	27.5
0.9688	0.0039	0.9766	27.0	0.4	27.8
0.9844	0.0287	1.0418	27.5	0.4	28.3
1.0000	0.0248	1.0496	28.0	0.3	28.6
1.0313	0.0220	1.0753	28.5	0.2	28.9
1.0625	0.0173	1.0971	29.0	0.8	30.6
1.0938	0.0141	1.1220	29.5	0.8	31.1
1.1250	0.0039	1.1328	30.0	0.7	31.4
1.1563	0.0295	1.2153	30.5	0.7	31.9
1.1875	0.0277	1.2429	31.0	0.6	32.2
1.2188	0.0218	1.2624	31.5	0.5	32.5
1.2500	0.0188	1.2876	32.0	0.5	33.0
1.2813	0.0169	1.3151	32.5	0.4	33.3
1.3125	0.0078	1.3281	33.0	0.4	33.8
1.3438	0.0393	1.4224	33.5	0.2	33.9
1.3750	0.0315	1.4380	34.0	1.1	36.2
1.4063	0.0236	1.4535	34.5	0.9	36.3
1.4375	0.0275	1.4925	35.0	0.8	36.6
1.4688	0.0196	1.5080	35.5	0.7	36.9
1.5000	0.0118	1.5236	36.0	0.8	37.6
1.5313	0.0039	1.5391	37.0	0.6	38.2
1.5625	0.0315	1.6255	37.5	0.4	38.3
1.5938	0.0275	1.6488	38.0	0.3	38.6
1.6250	0.0275	1.6800	39.0	1.0	41.0
1.6563	0.0236	1.7035	40.0	0.9	41.8
1.6875	0.0157	1.7189	40.5	0.8	42.1
1.7188	0.0118	1.7424	41.0	0.8	42.6
1.7500	0.0078	1.7656	42.0	0.6	43.2
1.7813	0.0314	1.8441	43.0	0.5	44.0
1.8125	0.0275	1.8675	44.0	0.3	44.6
1.8438	0.0196	1.8830	45.0	0.9	46.8
1.8750	0.0196	1.9142	46.0	0.8	47.6
1.9063	0.0157	1.9377	47.0	0.7	48.4
1.9375	0.0078	1.9531	48.0	0.5	49.0
1.9688	0.0433	2.0554	49.0	0.3	49.6
2.0000	0.0354	2.0708	50.0	1.1	52.2
2.1250	0.0157	2.1564	50.5	1.0	52.5
2.2500	0.0433	2.3366	51.0	1.0	53.0
2.3750	0.0275	2.4300	52.0	0.8	53.6
2.5000	0	2.5000	53.0	0.7	54.4
			54.0	0.6	55.2
			55.0	0.4	55.8
			56.0	0.1	56.2
			57.0	1.1	59.2
			58.0	1.0	60.0
			59.0	0.9	60.8
			60.0	0.8	61.6
			61.0	0.6	62.2
			62.0	0.4	62.8
			63.0	0.2	63.4



Maximum Offset Amount, A, for Drilling on a lathe.






Reference Value of PD Hmax

Drill Diameter (Inch)	Hmax (Inch)
0.472 - 0.571	0.024
0.591 - 0.650	0.031
0.669 - 0.728	0.035
0.748 - 0.807	0.043
0.827 - 0.965	0.047
0.984 - 1.122	0.059
1.142 - 1.319	0.063
1.339 - 2.500	0.067
1.535 - 1.732	0.079
1.772 - 1.929	0.091
1.968 - 2.205	0.098
2.244 - 2.500	0.102

Drill Diameter (mm)	Hmax (mm)
12 - 14.5	0.6
15 - 16.5	0.8
17 - 18.5	0.9
19 - 20.5	1.1
21 - 24.5	1.2
22 - 28.5	1.5
29 - 33.5	1.6
34 - 38	1.7
39 - 44	2
45 - 49	2.3
50 - 56	2.5
57 - 63	2.6

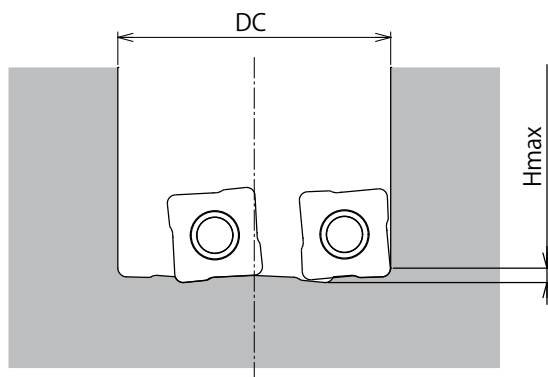

PD Hole Diameter Tolerance

Diameter (Inch)	P2D (Inch)	P3D (Inch)	P4D (Inch)	P5D (Inch)
0.4724 - 0.8071	+0.0098 / -0	+0.0098 / -0	+0.0118 / -0	+0.0118 / -0
0.8268 - 1.9291	+0.0118 / -0	+0.0118 / -0	+0.0157 / -0	+0.0157 / -0
1.9685 - 2.5000	+0.0138 / -0	+0.0138 / -0	+0.0197 / -0	+0.0197 / -0

The above values are general values and may differ based on actual machining conditions.

Diameter (mm)	P2D (mm)	P3D (mm)	P4D (mm)	P5D (mm)
12 - 20.5	+0.25 / -0	+0.25 / -0	+0.30 / -0	+0.30 / -0
21 - 49	+0.30 / -0	+0.30 / -0	+0.40 / -0	+0.40 / -0
50 - 63	+0.35 / -0	+0.35 / -0	+0.50 / -0	+0.50 / -0

The above values are general values and may differ based on actual machining conditions.

