List 8226

A BRAND AE-VMSS-RA, Right Angle Type

NEW | SPEED FEED 1336 | CARBIDE | DUARISE | 4 FLUTE | 37-40° | SHANK h6 | STUB | PACKED 1 PIECE

Cutting Diameter Tolerance	
1mm ≤ D ≤ 6mm	+0 / -0.020mm

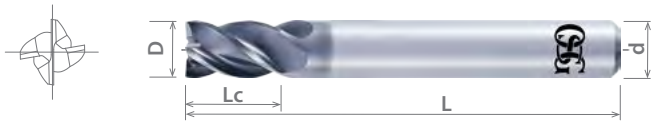

EDP Number		Diameter D (mm)	Length of Cut Lc (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Type
8556550	▲	1.00	1.50	40.00	4.00	1
8556560	▲	2.00	3.00	40.00	4.00	1
8556570	▲	3.00	4.50	45.00	6.00	1
8556580	▲	4.00	6.00	45.00	6.00	1
8556590	▲	5.00	7.50	45.00	6.00	1
8556600	▲	6.00	9.00	45.00	6.00	2

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

AEM

Type 1

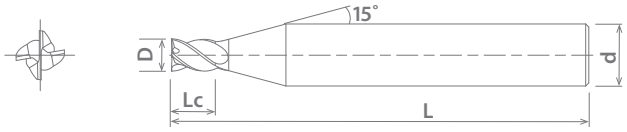

Type 2



Right Angle Type for Milling Straight Corners

Right Angle Type
AE-VMSS,VMS(-RA)



Straight corners with no uncut residue.

Square Type
AE-VMSS,VMS



Choose the right angle type for milling straight corners!

Choose the square type for high processing efficiency!

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium				
Low	Medium	High														
1010 1018	1035 1045	1065	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
◎	◎	○	◎	◎	◎	◎	◎	◎	○	○	○	○	◎	○		

○ Good ◎ Best