




## List 12006

OSG GENERAL PURPOSE-NPTF SHORT PROJECTION

STRAIGHT FLUTE	HSS	BR	0°	PACKED 1 PIECE
----------------	-----	----	----	-------------------

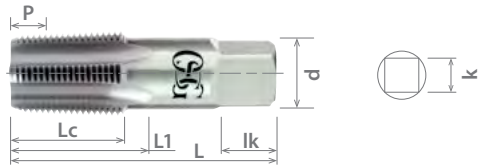

EDP	Thread Size	Overall Length	Thread Length	Neck Length	Shank Diameter	Square Width	Square Length	Projection	Number of Flutes
		L (Inch)	Lc (Inch)	L1 (Inch)	d (Inch)	k (Inch)	lk (Inch)	P (Inch)	
1200600100	● 1/8 - 27 NPTF	2.126	0.752	0.988	0.438	0.328	0.375	0.204	4
1200600600	● 1/8 - 27 NPTF	2.126	0.752	0.988	0.438	0.328	0.375	0.167	4
1200600200	● 1/4 - 18 NPTF	2.437	1.063	1.319	0.563	0.421	0.438	0.306	4
1200600700	● 1/4 - 18 NPTF	2.437	1.063	1.319	0.563	0.421	0.438	0.251	4
1200600300	● 3/8 - 18 NPTF	2.563	1.063	1.319	0.700	0.531	0.500	0.306	4
1200600800	● 3/8 - 18 NPTF	2.563	1.063	1.319	0.700	0.531	0.500	0.251	4
1200600400	● 1/2 - 14 NPTF	3.126	1.374	-	0.688	0.515	0.625	0.393	4
1200600900	● 1/2 - 14 NPTF	3.126	1.374	-	0.688	0.515	0.625	0.322	4
1200600500	● 3/4 - 14 NPTF	3.252	1.374	-	0.906	0.679	0.688	0.393	5
1200601000	● 3/4 - 14 NPTF	3.252	1.374	-	0.906	0.679	0.688	0.322	5

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N		S		H						
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel						
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium							
Low	Medium	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1010	1035	1065	4140	4340															
1018	1045																		
○	○	○						○	○	○									
15-40 SFM	10-25 SFM	10-20 SFM						15-50 SFM	15-40 SFM	20-35 SFM									

○ Good ⊙ Best

