




List 13163

EXOPRO[®] Ti V-CPM-RFT, RHC/LHS for Through Hole

	SPIRAL FLUTE	VC10	V	3 FLUTE	C/4.5P	21°	LH	PACKED 1 PIECE
--	--------------	------	---	---------	--------	-----	----	-------------------

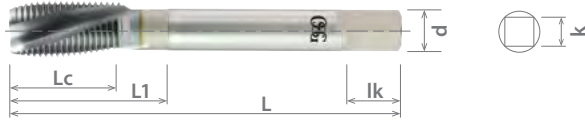

EDP Number	Thread Size	Thread Limit	Overall Length			Shank Diameter	Square Width	Square Length
			L (mm)	Lc (mm)	L1 (mm)			
1316300108	● M2.5 x 0.45	D3	47.60	12.00	13.80	3.58	2.79	4.76
1316300208	● M3 x 0.5	D3	50.80	6.00	16.00	3.58	2.79	4.76
1316300308	● M4 x 0.7	D4	55.80	8.00	19.10	4.27	3.33	6.35
1316300408	● M5 x 0.8	D4	62.40	9.00	22.20	4.93	3.86	6.35
1316300508	● M6 x 1	D5	65.50	12.00	25.40	6.48	4.85	7.30
1316300808	● M8 x 1.25	D5	69.10	15.00	28.60	8.08	6.05	9.53
1316300908	● M10 x 1.25	D5	74.60	18.00	31.80	9.68	7.26	11.11
1316301008	● M10 x 1.5	D6	74.60	18.00	31.80	9.68	7.26	11.11
1316301108	● M12 x 1.25	D5	85.70	21.00	32.00	9.32	6.99	11.11
1316301308	● M12 x 1.75	D6	85.70	21.00	32.00	9.32	6.99	11.11

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

EP

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium							
Low	Medium	High			6061	Casting				Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1010	1035	1065	4140	○	300	400	17-4 PH	○	7075			○				
1018	1045		4340					○				⊗	○			
			15-50 SFM				8-20 SFM					8-20 SFM	15-35 SFM			

○ Good ⊗ Best

