



## List 52505


OSG PHOENIX® P5D, Flat Shank


**SPEED FEED**  
364

**INSERTS**  
282-283

**ACCS.**  
284

**STEEL**

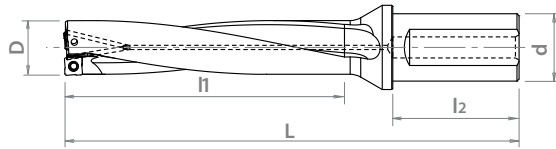**2 FLUTE**
**PACKED**  
1 PIECE


EDP Number	Designation	Diameter	Drilling Depth	Overall Length	Shank Diameter	Shank Length	Applicable Insert
		D (in)	l1 (in)	L (in)	d (in)	l2 (in)	
52505063	P5D0484FS075A03	0.484	2.422	4.981	0.750	1.969	XCMT03
52505064	P5D0500FS075A03	0.500	2.500	5.059	0.750	1.969	XCMT03
52505065	P5D0516FS075A03	0.516	2.578	5.137	0.750	1.969	XCMT03
52505066	P5D0531FS075A03	0.531	2.656	5.215	0.750	1.969	XCMT03
52505067	P5D0547FS075A03	0.547	2.734	5.294	0.750	1.969	XCMT03
52505068	P5D0563FS075A03	0.563	2.813	5.372	0.750	1.969	XCMT03
52505069	P5D0578FS075A03	0.578	2.891	5.450	0.750	1.969	XCMT03
52505026	P5D0594FS075A04	0.594	2.969	5.529	0.750	1.969	XCMT04
52505027	P5D0609FS075A04	0.609	3.047	5.604	0.750	1.969	XCMT04
52505008	P5D0625FS075A04	0.625	3.125	5.684	0.750	1.969	XCMT04
52505028	P5D0641FS075A04	0.641	3.203	5.764	0.750	1.969	XCMT04
52505009	P5D0656FS075A04	0.656	3.281	5.839	0.750	1.969	XCMT04
52505029	P5D0672FS075A05	0.672	3.359	6.037	0.750	1.969	XCMT05
52505010	P5D0688FS075A05	0.688	3.438	6.117	0.750	1.969	XCMT05
52505030	P5D0703FS075A05	0.703	3.516	6.192	0.750	1.969	XCMT05
52505031	P5D0719FS100A05	0.719	3.594	6.508	1.000	2.205	XCMT05
52505032	P5D0734FS100A05	0.734	3.672	6.583	1.000	2.205	XCMT05
52505011	P5D0750FS100A06	0.750	3.750	6.663	1.000	2.205	XCMT06
52505033	P5D0766FS100A06	0.766	3.828	6.743	1.000	2.205	XCMT06
52505034	P5D0781FS100A06	0.781	3.906	6.819	1.000	2.205	XCMT06
52505035	P5D0797FS100A06	0.797	3.984	6.898	1.000	2.205	XCMT06
52505012	P5D0812FS100A06	0.813	4.063	6.973	1.000	2.205	XCMT06
52505036	P5D0828FS100A07	0.828	4.141	7.250	1.000	2.205	XCMT07
52505037	P5D0844FS100A07	0.844	4.219	7.330	1.000	2.205	XCMT07
52505038	P5D0859FS100A07	0.859	4.297	7.405	1.000	2.205	XCMT07
52505000	P5D0875FS100A07	0.875	4.375	7.485	1.000	2.205	XCMT07
52505039	P5D0891FS100A07	0.891	4.453	7.565	1.000	2.205	XCMT07
52505040	P5D0906FS100A07	0.906	4.531	7.640	1.000	2.205	XCMT07
52505041	P5D0922FS100A07	0.922	4.609	7.720	1.000	2.205	XCMT07
52505001	P5D0937FS125A07	0.938	4.688	7.953	1.250	2.362	XCMT07
52505042	P5D0953FS125A07	0.953	4.766	8.033	1.250	2.362	XCMT07
52505043	P5D0969FS125A07	0.969	4.844	8.113	1.250	2.362	XCMT07
52505044	P5D0984FS125A08	0.984	4.922	8.188	1.250	2.362	XCMT08
52505002	P5D1000FS125A08	1.000	5.000	8.268	1.250	2.362	XCMT08
52505045	P5D1031FS125A08	1.031	5.156	8.423	1.250	2.362	XCMT08
52505003	P5D1062FS125A08	1.063	5.313	8.578	1.250	2.362	XCMT08
52505046	P5D1094FS125A08	1.094	5.469	8.738	1.250	2.362	XCMT08
52505004	P5D1125FS125A08	1.125	5.625	8.893	1.250	2.362	XCMT08
52505047	P5D1156FS125A09	1.156	5.781	9.048	1.250	2.362	XCMT09
52505005	P5D1187FS125A09	1.188	5.938	9.203	1.250	2.362	XCMT09
52505048	P5D1219FS125A09	1.219	6.094	9.363	1.250	2.362	XCMT09
52505006	P5D1250FS125A09	1.250	6.250	9.518	1.250	2.362	XCMT09
52505049	P5D1281FS150A09	1.281	6.406	10.067	1.500	2.756	XCMT09
52505007	P5D1312FS150A09	1.313	6.563	10.221	1.500	2.756	XCMT09
52505050	P5D1344FS150A10	1.344	6.719	10.381	1.500	2.756	XCMT10
52505013	P5D1375FS150A10	1.375	6.875	10.537	1.500	2.756	XCMT10
52505051	P5D1406FS150A10	1.406	7.031	10.691	1.500	2.756	XCMT10
52505014	P5D1437FS150A10	1.438	7.188	10.846	1.500	2.756	XCMT10
52505052	P5D1469FS150A10	1.469	7.344	11.006	1.500	2.756	XCMT10
52505015	P5D1500FS150A10	1.500	7.500	11.161	1.500	2.756	XCMT10
52505053	P5D1531FS150A10	1.531	7.656	11.317	1.500	2.756	XCMT10
52505016	P5D1563FS150A12	1.563	7.813	11.752	1.500	2.756	XCMT12
52505054	P5D1594FS150A12	1.594	7.969	11.907	1.500	2.756	XCMT12

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked






## List 52505 (Continued)

OSG PHOENIX® P5D, Flat Shank

SPEED FEED	INSERTS	ACCS.	STEEL	2 FLUTE	PACKED
364	282-283	284			1 PIECE



EDP Number	Designation	Diameter		Drilling Depth		Overall Length		Shank Diameter		Shank Length		Applicable Insert
		D (in)	l1 (in)	L (in)	d (in)	l2 (in)	l2 (in)	l2 (in)				
52505017	●	P5D1625FS150A12	1.625	8.125	12.062	1.500	2.756	XCMT12				
52505055	●	P5D1656FS150A12	1.656	8.281	12.217	1.500	2.756	XCMT12				
52505018	●	P5D1688FS150A12	1.688	8.438	12.377	1.500	2.756	XCMT12				
52505056	●	P5D1719FS150A12	1.719	8.594	12.532	1.500	2.756	XCMT12				
52505019	●	P5D1750FS150A12	1.750	8.750	12.687	1.500	2.756	XCMT12				
52505057	●	P5D1781FS150A13	1.781	8.906	12.842	1.500	2.756	XCMT13				
52505058	●	P5D1813FS150A13	1.813	9.063	13.002	1.500	2.756	XCMT13				
52505059	●	P5D1844FS150A13	1.844	9.219	13.157	1.500	2.756	XCMT13				
52505020	●	P5D1875FS150A13	1.875	9.375	13.312	1.500	2.756	XCMT13				
52505060	●	P5D1906FS150A13	1.906	9.531	13.467	1.500	2.756	XCMT13				
52505061	●	P5D1938FS150A13	1.938	9.688	13.627	1.500	2.756	XCMT13				
52505062	●	P5D1969FS150A14	1.969	9.844	13.782	1.500	2.756	XCMT14				
52505021	●	P5D2000FS150A14	2.000	10.000	13.937	1.500	2.756	XCMT14				
52505022	●	P5D2125FS150A14	2.125	10.625	14.562	1.500	2.756	XCMT14				
52505023	●	P5D2250FS150A16	2.250	11.250	15.187	1.500	2.756	XCMT16				
52505024	●	P5D2375FS150A16	2.375	11.875	15.812	1.500	2.756	XCMT16				
52505025	●	P5D2500FS150A16	2.500	12.500	16.437	1.500	2.756	XCMT16				

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



### DESIGNATION EXPLANATION

**P5D-0484-FS-075-A-03**



See Full Detail on Page 360

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

