




## List 7010

EXOCARB® DIAMOND D-RG-EDBR

<b>SPEED FEED</b> 1383	<b>CARBIDE</b>	<b>DIA</b>	<b>2 FLUTE</b>	<b>30°</b>		<b>SHANK</b> h6	<b>REG</b>	<b>LONG</b>	<b>PACKED</b> 1 PIECE
---------------------------	----------------	------------	----------------	------------	--	--------------------	------------	-------------	--------------------------

Radius Tolerance	
1/32" ≤ D ≤ 1/2"	+0 / -0.0020

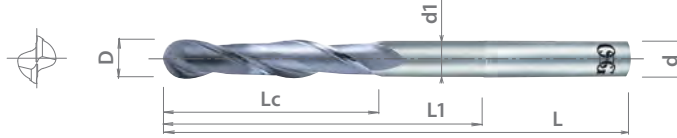

EDP Number		Diameter		Length of Cut		Neck Length		Neck Diameter		Overall Length		Shank Diameter		Coating Thickness	
		D (Fractional Size)	Lc (Inch)	L1 (Inch)	d1 (Inch)	L (Inch)	d (Inch)	μm							
70100116	●	1/32	0.094	0.250	0.028	1.750	0.125	12							
70100216	●	3/64	0.188	0.500	0.040	1.750	0.125	12							
70100316	●	1/16	0.188	0.500	0.056	1.750	0.125	12							
70100416	●	5/64	0.250	0.500	0.070	1.750	0.125	12							
70100516	●	3/32	0.375	0.500	0.088	1.750	0.125	12							
70100716	●	1/8	0.500	-	-	1.750	0.125	12							
70105716	●	1/8	0.500	-	-	1.750	0.125	20							
70100816	●	5/32	0.563	-	-	2.000	0.156	12							
70100916	●	3/16	0.750	-	-	2.000	0.188	12							
70101116	●	1/4	0.750	-	-	2.500	0.250	12							
70106116	●	1/4	0.750	-	-	2.500	0.250	20							
70101316	●	5/16	0.813	-	-	2.500	0.313	12							
70101416	●	3/8	0.875	-	-	2.500	0.375	12							
70106416	●	3/8	0.875	-	-	2.500	0.375	20							
70101616	●	1/2	1.000	-	-	3.000	0.500	12							
70106616	●	1/2	1.000	-	-	3.000	0.500	20							

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N			S		Other	
Steel					Stainless Steel			Cast Iron	Non-Ferrous			HRSA		Graphite	Cobalt-Chrome
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Mg		Brass, Bronze	Nickel Alloy	Titanium				
Low	Medium	High			6061	7075						Casting	Inconel		
1010	1035	1065	4140	4340	300	400	17-4 PH								
1018	1045								○	○				○	

○ Good ○ Best

