



List 8470

A BRAND AE-CR-MS-H



NEW

SPEED FEED
1348-1349

CARBIDE
DUOREY

43°




SHRINK FIT

REG


PACKED
1 PIECE

Cutting Diameter Tolerance	
1/4" ≤ D ≤ 1/2"	+0 / -0.0008"



EDP Number	Diameter	Corner Radius	Length of Cut	Neck Length	Overall Length	Shank Diameter	Number of Flutes	Type	Center Cutting	
										D (Fractional Size)
84700023	●	1/16	0.010	0.156	0.600	2.500	0.250	4	1	-
84700123	●	5/64	0.010	0.195	0.646	2.500	0.250	4	1	-
84700223	●	3/32	0.010	0.234	0.698	2.500	0.250	4	1	-
84700323	●	7/64	0.010	0.273	0.668	2.500	0.250	4	1	-
84700423	●	1/8	0.010	0.313	0.686	2.500	0.250	4	1	-
84700523	●	1/8	0.020	0.313	0.686	2.500	0.250	4	1	●
84700623	○	1/8	0.030	0.313	0.686	2.500	0.250	4	1	●
84700723	●	5/32	0.020	0.391	0.825	2.500	0.250	4	1	●
84700823	○	5/32	0.030	0.391	0.825	2.500	0.250	4	1	●
84700923	●	3/16	0.010	0.469	0.767	2.500	0.250	4	1	●
84701023	●	3/16	0.020	0.469	0.767	2.500	0.250	4	1	●
84701123	○	3/16	0.030	0.469	0.767	2.500	0.250	4	1	●
84701223	●	7/32	0.020	0.547	0.871	2.500	0.250	4	1	●
84701323	●	1/4	0.010	0.625	-	2.500	0.250	6	2	●
84701423	●	1/4	0.020	0.625	-	2.500	0.250	6	2	●
84701523	○	1/4	0.030	0.625	-	2.500	0.250	6	2	●
84701623	○	9/32	0.020	0.703	1.033	2.500	0.313	6	1	●
84701723	●	5/16	0.020	0.781	-	2.750	0.313	6	2	●
84701823	●	3/8	0.020	0.938	-	3.000	0.375	6	2	●
84701923	●	3/8	0.030	0.938	-	3.000	0.375	6	2	●
84702023	○	3/8	0.060	0.938	-	3.000	0.375	6	2	●
84702123	●	7/16	0.030	1.094	-	3.000	0.438	6	2	●
84702223	●	1/2	0.020	1.250	-	3.500	0.500	6	2	●
84702323	●	1/2	0.030	1.250	-	3.500	0.500	6	2	●
84702423	○	1/2	0.060	1.250	-	3.500	0.500	6	2	●
84702523	●	5/8	0.030	1.563	-	4.000	0.625	6	2	●
84702623	●	5/8	0.060	1.563	-	4.000	0.625	6	2	●
84702723	●	3/4	0.030	1.875	-	4.250	0.750	6	2	●
84702823	○	3/4	0.060	1.875	-	4.250	0.750	6	2	●
84702923	○	1	0.060	2.500	-	4.500	1.000	8	2	-
84703023	○	1	0.090	2.500	-	4.500	1.000	8	2	-

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

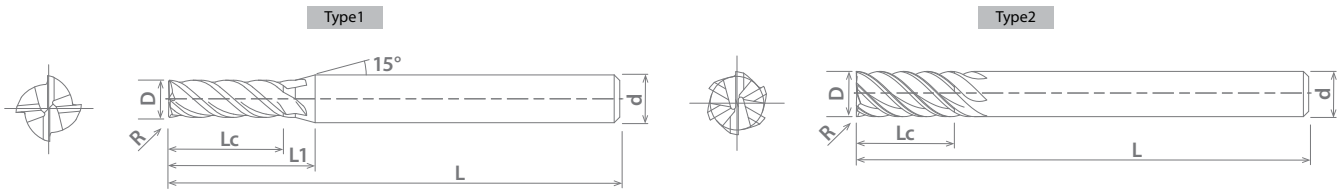

P					M			K	N		S		H						
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel						
Carbon Steel			Alloy Steel	Die Steel	300	400	17-4 PH		Aluminum		Nickel Alloy	Titanium	Hardened Steel						
Low	Medium	High							6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1010	1035	1045	1065	4140				4340											
1018	1045	1065																	

○ Good ⊗ Best

