



List 8542

A BRAND AE-ML-H



NEW

SPEED FEED
1350

CARBIDE

DUROREY

43°




SHANK
h6

LONG


PACKED
1 PIECE

Cutting Diameter Tolerance	
3mm ≤ D ≤ 12mm	+0 / -0.020mm

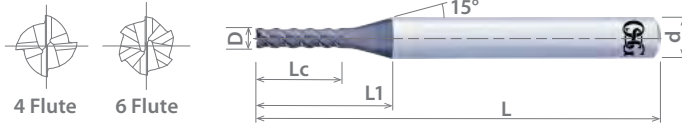

EDP Number		Diameter		Length of Cut		Neck Length		Overall Length		Shank Diameter		Number of Flutes	Type
		D (mm)	Lc (mm)	L1 (mm)	L (mm)	d (mm)	d (mm)						
8550010	●	3.00	12.00	19.90	60.00	6.00	4	1					
8550011	●	4.00	16.00	22.10	60.00	6.00	4	1					
8550012	●	5.00	20.00	24.20	70.00	6.00	4	1					
8550013	●	6.00	24.00	-	70.00	6.00	6	2					
8550014	●	8.00	32.00	-	80.00	8.00	6	2					
8550015	●	10.00	40.00	-	100.00	10.00	6	2					
8550016	●	12.00	48.00	-	110.00	12.00	6	2					

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

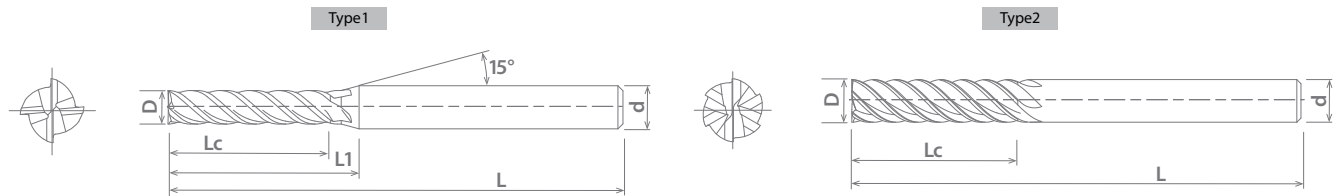

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium	Hardened Steel						
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH						○	○	⊙	⊙
1018	1045															

○ Good ⊙ Best

