



List 78012

OSG PHOENIX® PSE BORE




SPEED FEED 1529	INSERTS 1213-1215	ACCS. 1216	STEEL	PACKED 1 PIECE
---------------------------	-----------------------------	----------------------	--------------	--------------------------



EDP Number	Designation	Type	Dia. D (Inch)	Number of Flutes	Body Height	Flange Diameter	Bore Diameter	Keyway Width	Keyway Depth	Applicable Insert
					H (Inch)	D2 (Inch)	d3 (Inch)	a (Inch)	b (Inch)	
7801200	PSE11R200A075-5	2	2.000	5	1.575	1.772	0.750	0.315	0.197	ZD_T11
7801201	PSE11R250A075-6	2	2.500	6	1.575	1.968	0.750	0.315	0.197	ZD_T11
7801202	PSE11R300A100-7	2	3.000	7	1.968	2.362	1.000	0.375	0.236	ZD_T11
7801203	PSE11R200A075-7	2	2.000	7	1.575	1.772	0.750	0.315	0.197	ZD_T11
7801204	PSE11R250A075-8	2	2.500	8	1.575	1.968	0.750	0.315	0.197	ZD_T11
7801205	PSE11R300A100-10	2	3.000	10	1.968	2.362	1.000	0.375	0.236	ZD_T11
7801206	PSE15R200A075-3	2	2.000	3	1.575	1.772	0.750	0.315	0.197	ZDKT15
7801207	PSE15R250A075-4	2	2.500	4	1.575	1.968	0.750	0.315	0.197	ZDKT15
7801208	PSE15R300A100-5	2	3.000	5	1.968	2.362	1.000	0.375	0.236	ZDKT15
7801209	PSE15R400A150-7	3	4.000	7	1.968	2.756	1.500	0.625	0.394	ZDKT15
7801210	PSE15R500A150-8	3	5.000	8	2.480	3.543	1.500	0.625	0.394	ZDKT15
7801211	PSE15R200A075-5	2	2.000	5	1.575	1.772	0.750	0.315	0.197	ZDKT15
7801212	PSE15R250A075-6	2	2.500	6	1.575	1.968	0.750	0.315	0.197	ZDKT15
7801213	PSE15R300A100-8	2	3.000	8	1.968	2.362	1.000	0.375	0.236	ZDKT15
7801214	PSE15R400A150-10	3	4.000	10	1.968	2.756	1.500	0.625	0.394	ZDKT15
7801215	PSE15R500A150-11	3	5.000	11	2.480	3.543	1.500	0.625	0.394	ZDKT15
7801216	PSE15R600A150-10	3	6.000	10	2.480	3.740	1.500	0.625	0.394	ZDKT15
7801217	PSE15R600A150-12	3	6.000	12	2.480	3.740	1.500	0.625	0.394	ZDKT15


● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).

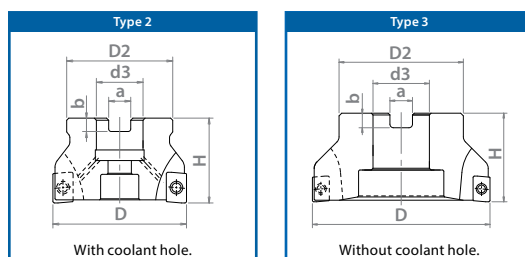

DESIGNATION EXPLANATION

PSE 11 R 200 A 075-5



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

